



**VT-127-1.0-1.3-71
Thermoelectric Module
(Peltier Module)
Specifications**

| | Material Specifications (27 °C hot side temperature) | Material Specifications (50 °C hot side temperature) |
|-------------------------------|---|---|
| Vmax (V) | 16.1 | 17.9 |
| I _{max} (A) | 3.6 | 3.6 |
| Q _{max} (W) | 36.0 | 39.5 |
| DT _{max} (°C) | 71 | 80 |
| Operation/storage temperature | -40 °C to +200 °C | |

Module *material* specifications are nominal values based on the hot-side temperature indicated. Thermoelectric material parameter tolerance is +/-10%.

In no case should the module temperature be allowed to exceed its maximum operation/storage temperature.

Please review all product and technical information, *Thermoelectric Module Mounting Procedure*, parameter definitions, FAQ's, and ordering information posted on our website before purchasing or using this product.

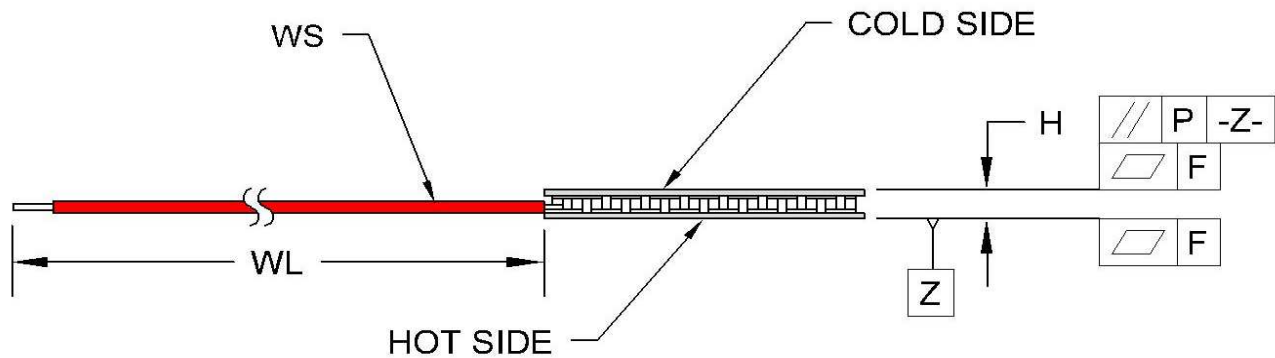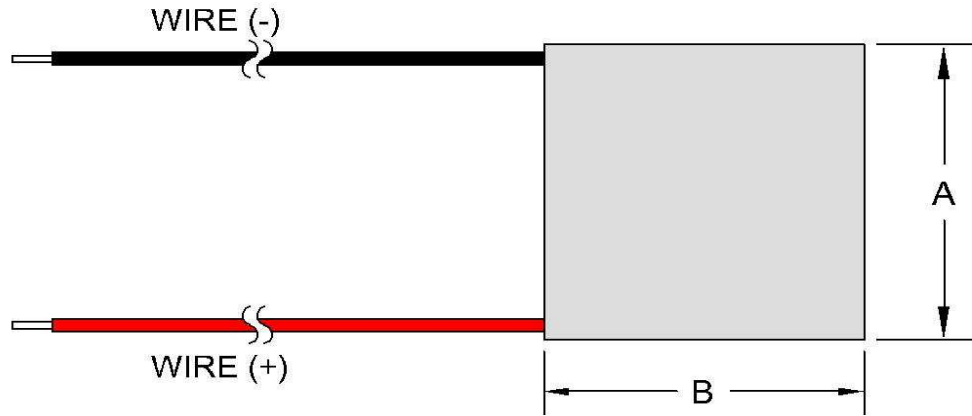

| | |
|----------------------------------|--------------|
| Width, A (mm) | 30 +0.5/-0.2 |
| Width, B (mm) | 30 +0.5/-0.2 |
| Height, H (mm) | 3.6 ±0.05 |
| Flatness, F (mm) | 0.02 |
| Parallelism, P (mm) | 0.03 |
| Wire Size, WS (mm ²) | 0.35 |
| Wire Length, WL (mm) | 120 |

Optional Features and Notes:

Add "P" to part number for sealing module with epoxy potting.
Maximum operating/storage temperature with potting is 150 °C





Performance graphs include thermal resistance of substrates.

RoHS Compliant





TE TECHNOLOGY, INC.®

1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@totech.com





Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

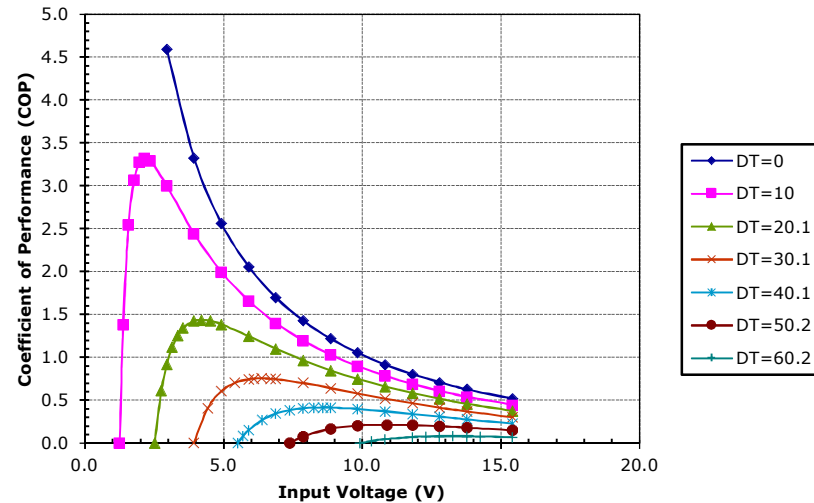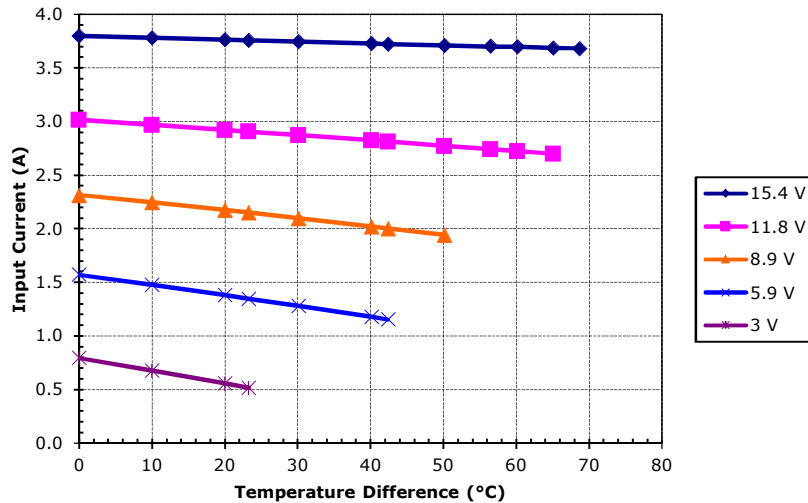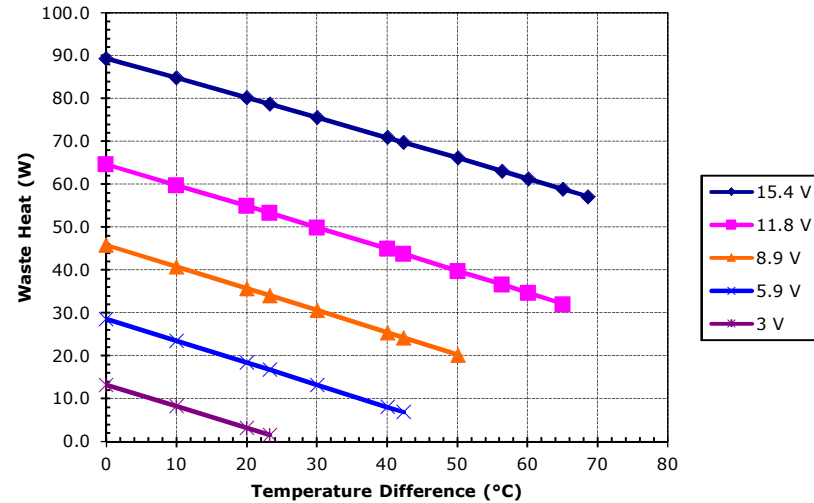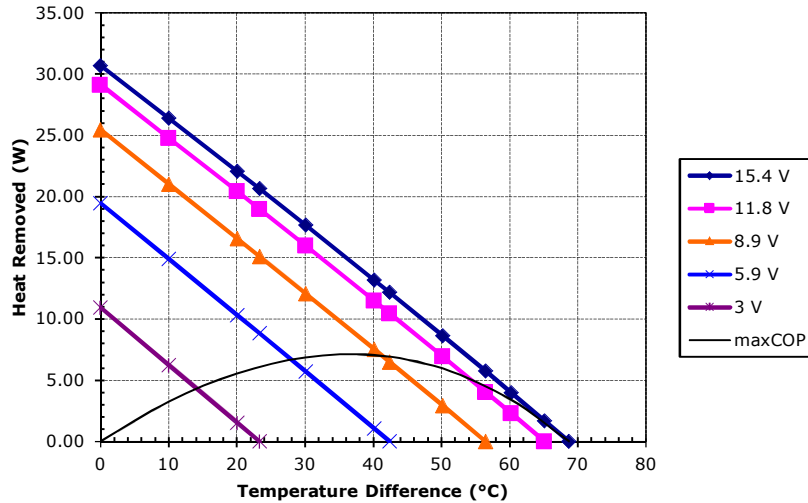





Unpotted VT-127-1.0-1.3-71 at a hot-side temperature of 30 °C

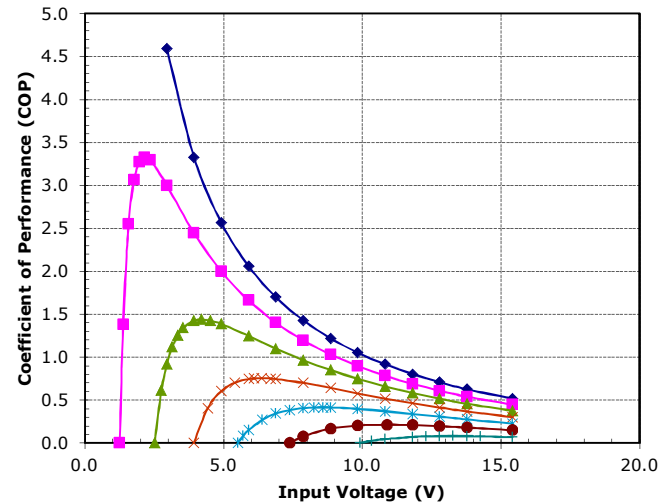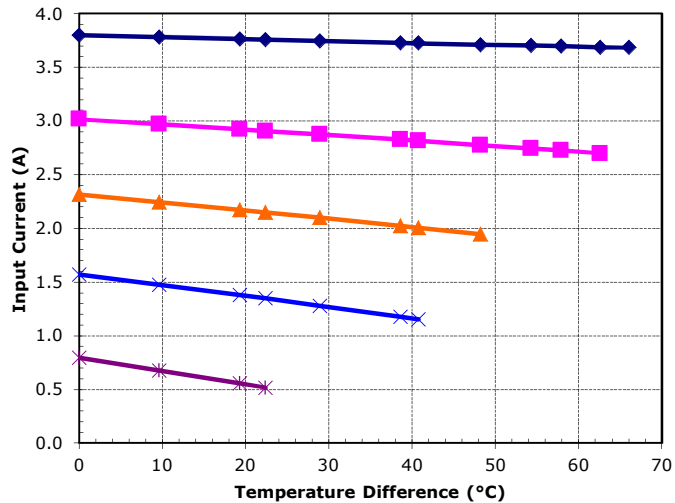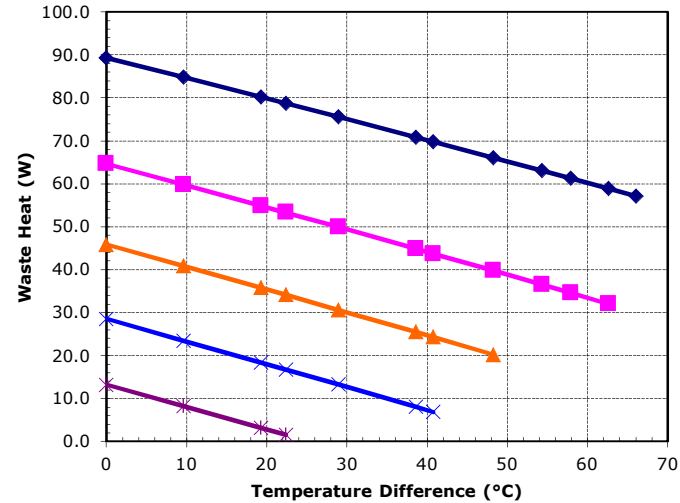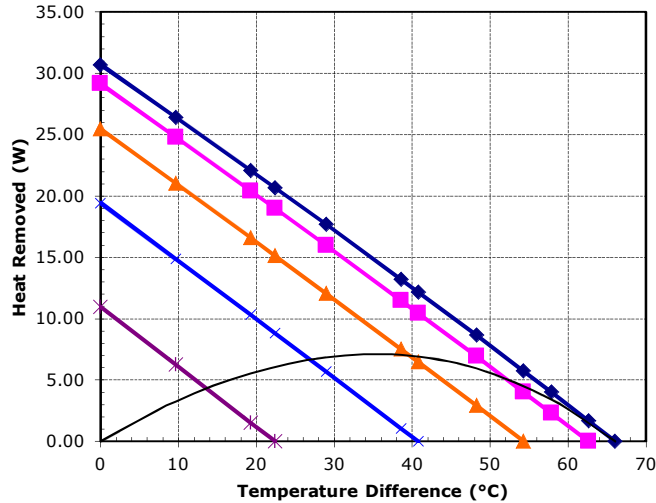





Potted VT-127-1.0-1.3-71 at a hot-side temperature of 30 °C

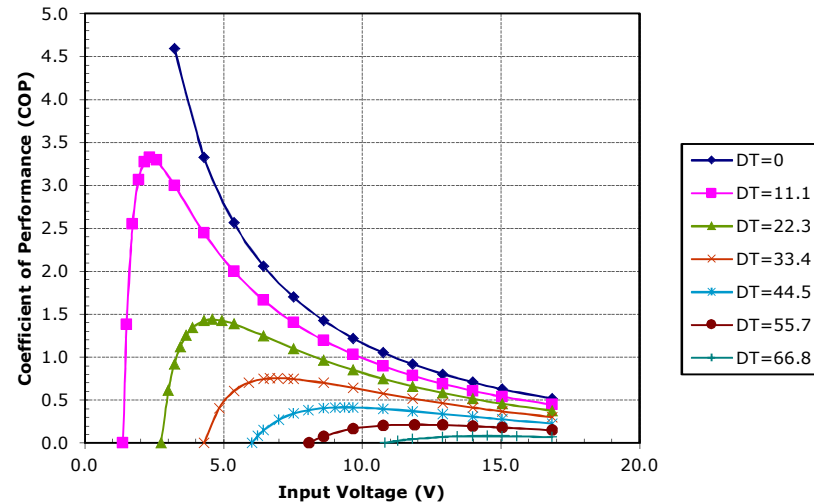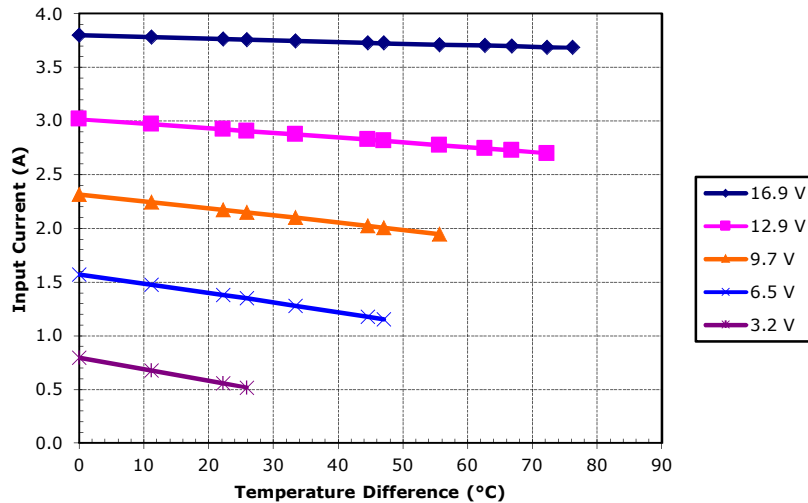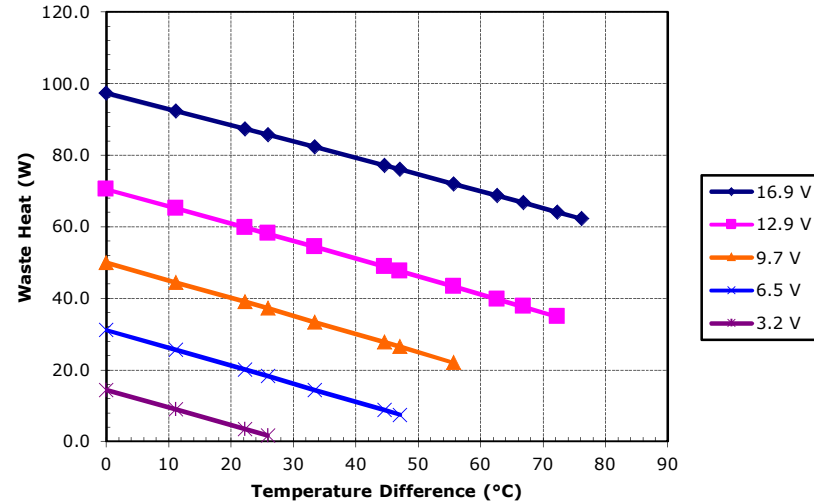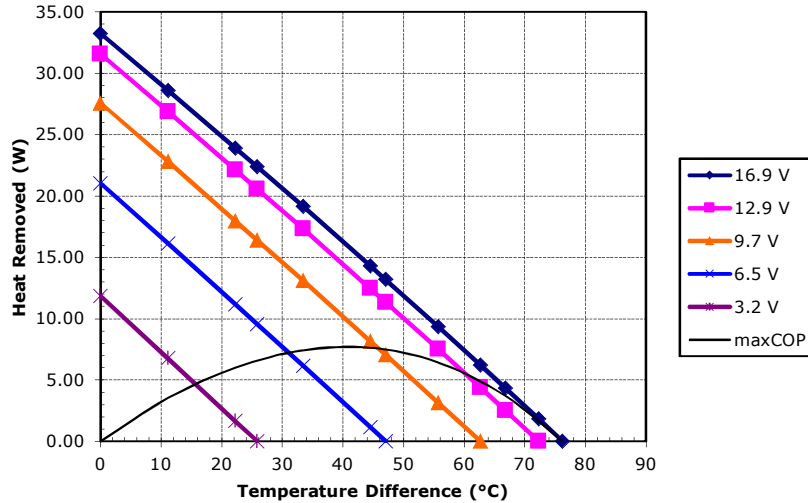





Unpotted VT-127-1.0-1.3-71 at a hot-side temperature of 50 °C

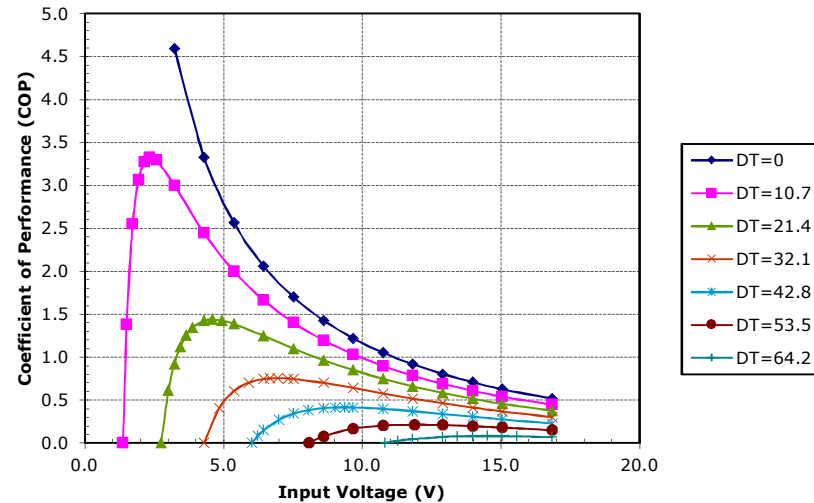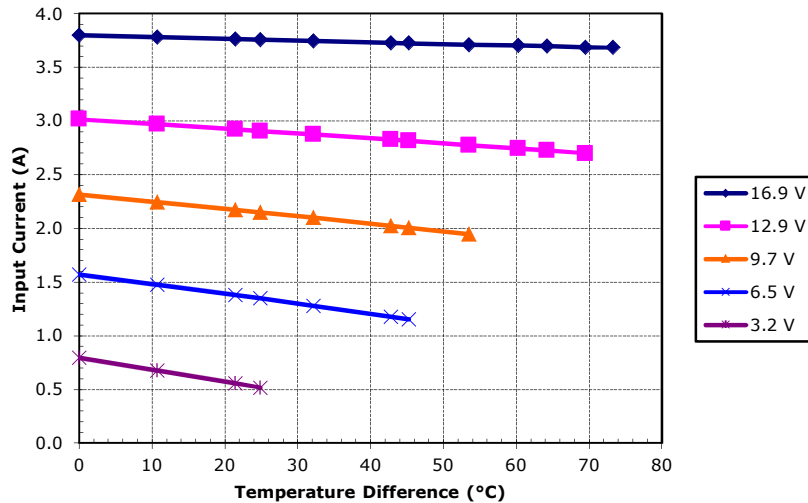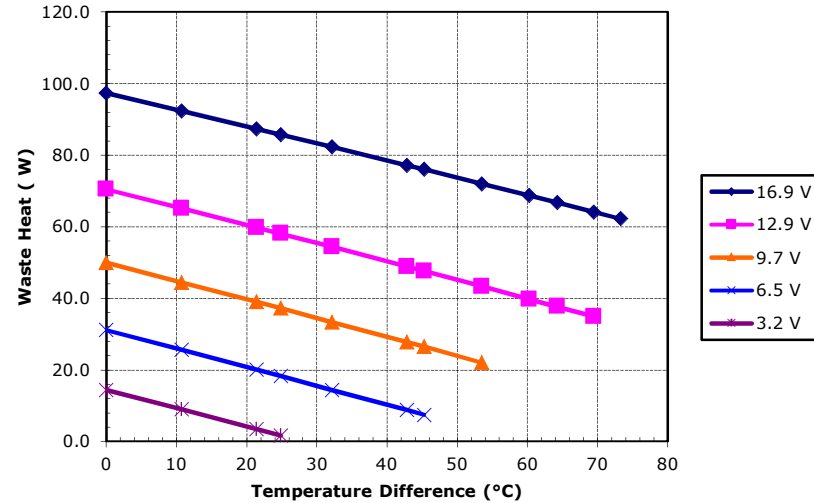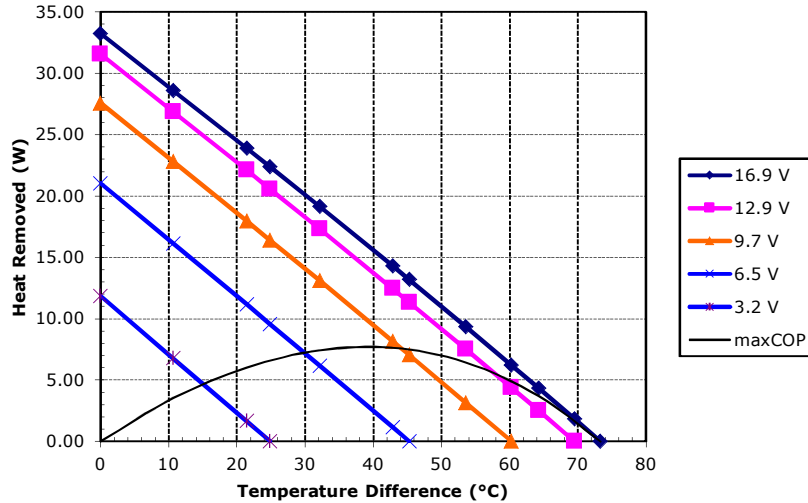

Potted VT-127-1.0-1.3-71 at a hot-side temperature of 50 °C

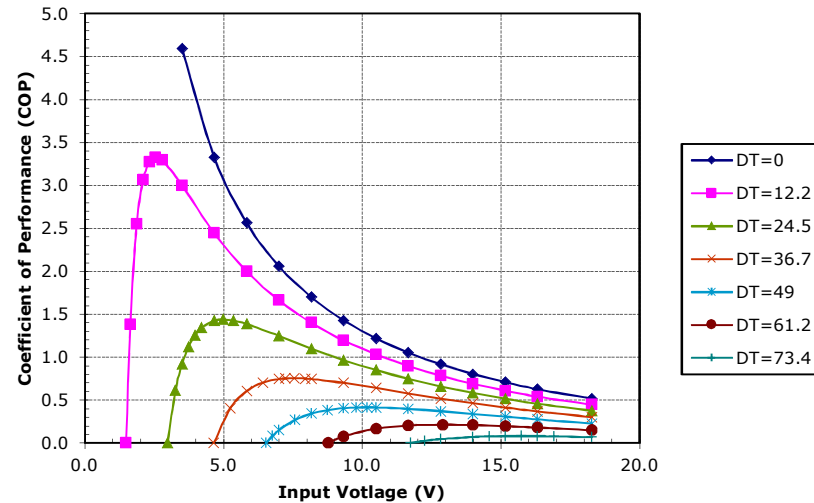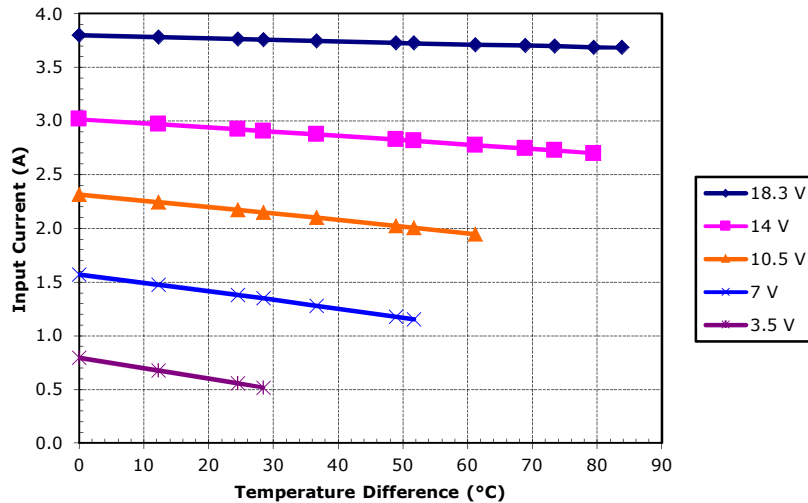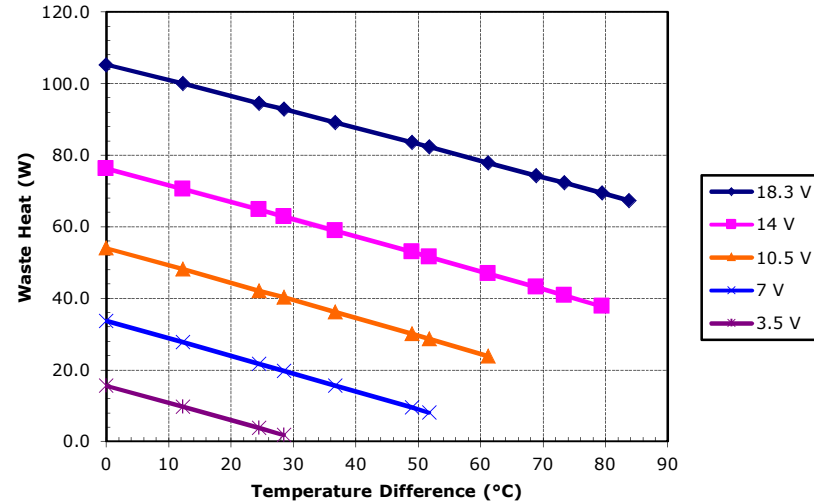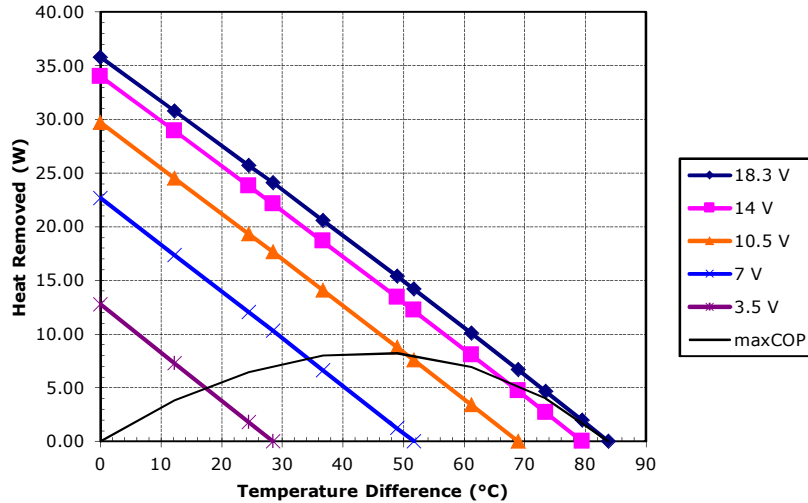

Unpotted VT-127-1.0-1.3-71 at a hot-side temperature of 70 °C

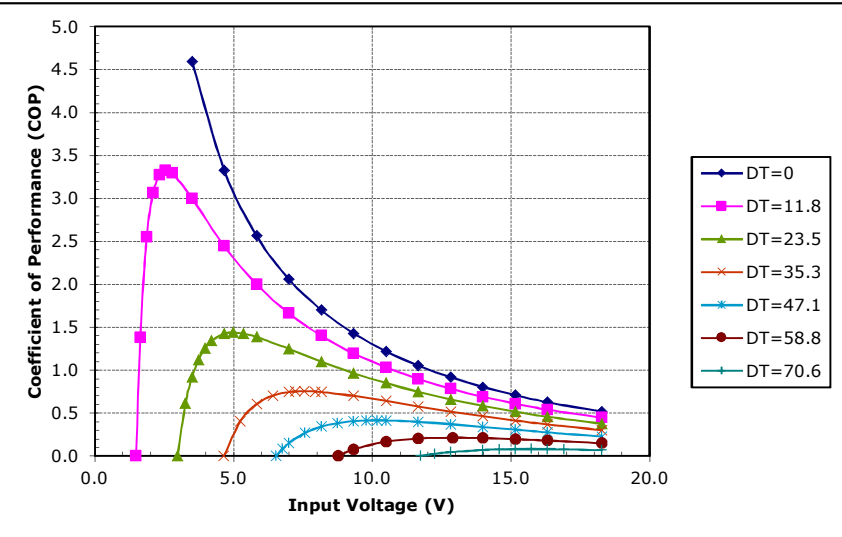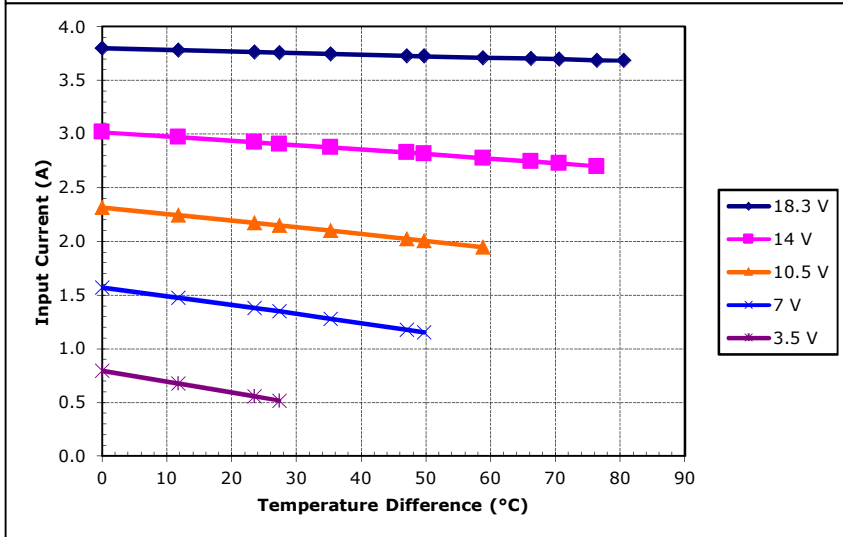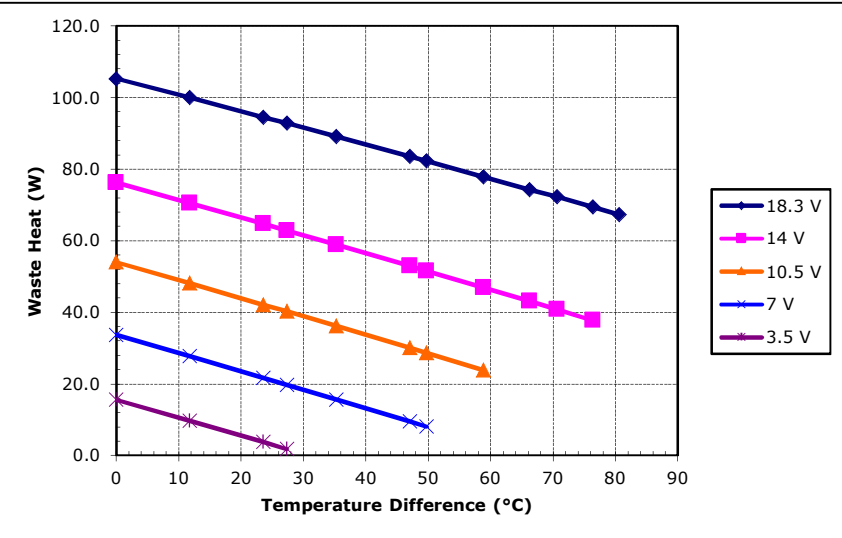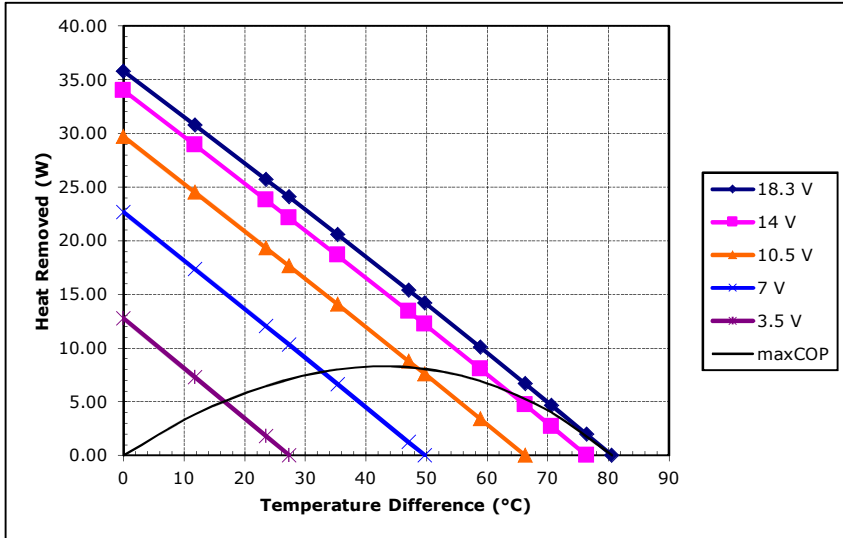

Potted VT-127-1.0-1.3-71 at a hot-side temperature of 70 °C