TE-31-0.6-1.0 Thermoelectric Module (Peltier Module) Specifications

	Material Specifications (27 °C hot side temperature)	Material Specifications (50 °C hot side temperature)
Vmax (V)	3.8	4.2
Imax (A)	1.7	1.7
Qmax (W)	3.9	4.3
DTmax (°C)	69	78
Operation/storage temperature	-40 °C to +80 °C	

Module *material* specifications are nominal values based on the hot-side temperature indicated. Thermoelectric material parameter tolerance is +/-10%.

In no case should the module temperature be allowed to exceed its maximum operation/storage temperature.

Please review all product and technical information, *Thermoelectric Module Mounting Procedure,* parameter definitions, FAQ's, and ordering information posted on our website before purchasing or using this product.

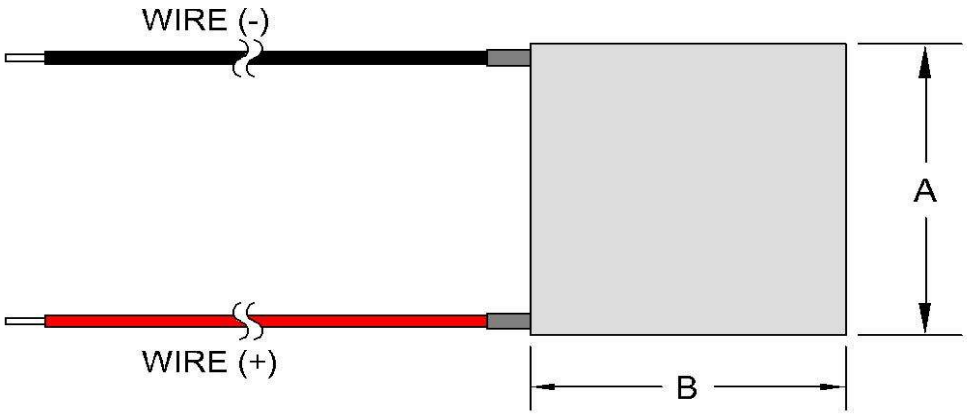

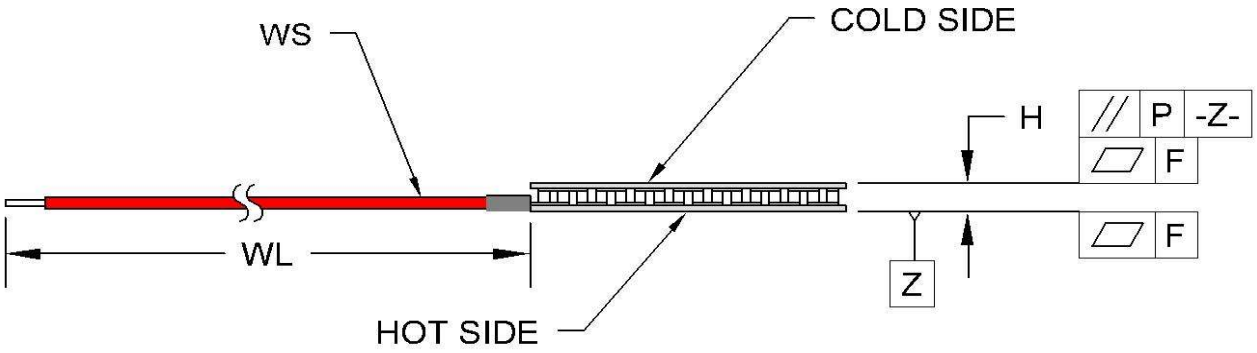

Width, A (mm)	8	+0.5/-0.2
Width, B (mm)	8	+0.5/-0.2
Height, H (mm)	2.75	±0.15
Flatness, F (mm)	0.15	
Parallelism, P (mm)	0.15	
Wire Size, WS (mm²)	0.12	
Wire Length, WL (mm)	50	

Optional Features and Notes:

Add "P" to part number for sealing module with epoxy potting.

Module includes 30 µm nickel metallization on hot and cold sides.

The metallization does not include pre-tinning.

Performance graphs include thermal resistance of substrates.

RoHS Compliant

TE TECHNOLOGY, INC.® 1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

NOTE: All specifications are subject to change without notice. © 2018 TE Technology, Inc.

TE TECHNOLOGY, INC.®
1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

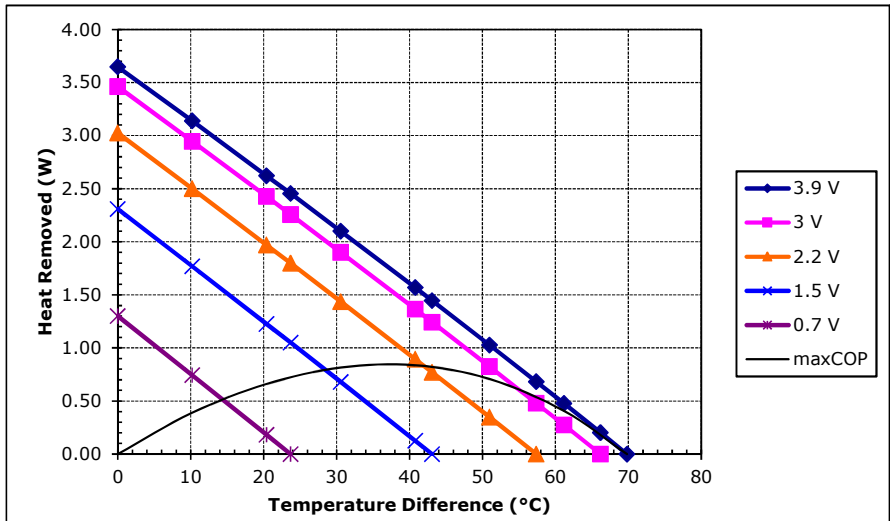

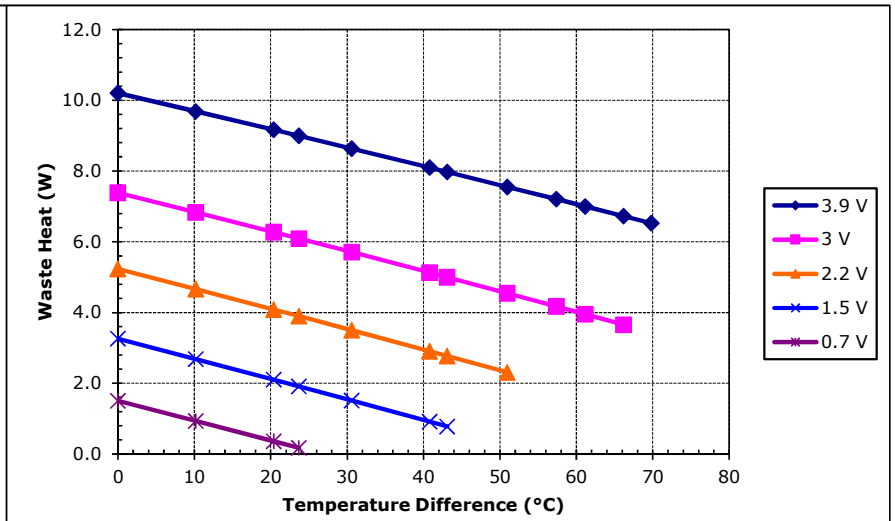

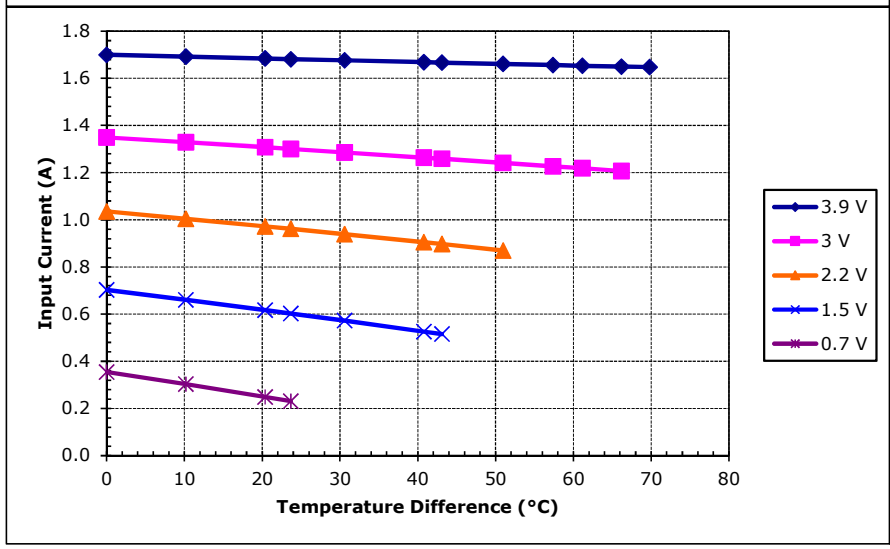

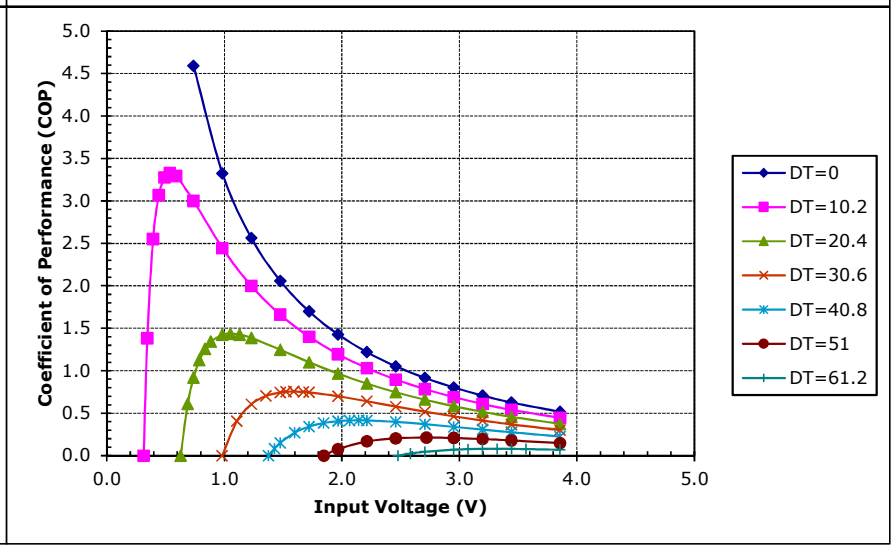

Unpotted TE-31-0.6-1.0 at a hot-side temperature of 30 °C

© 2018 TE Technology, Inc.

TE TECHNOLOGY, INC.®
1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

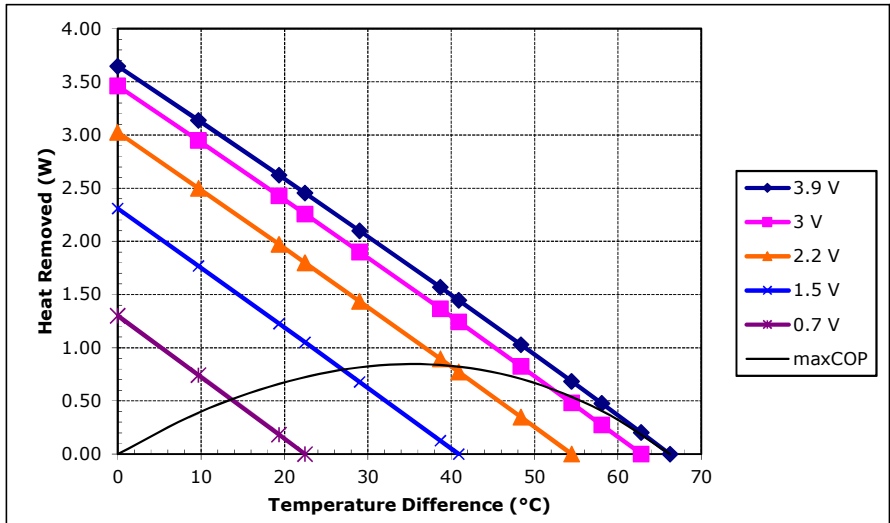

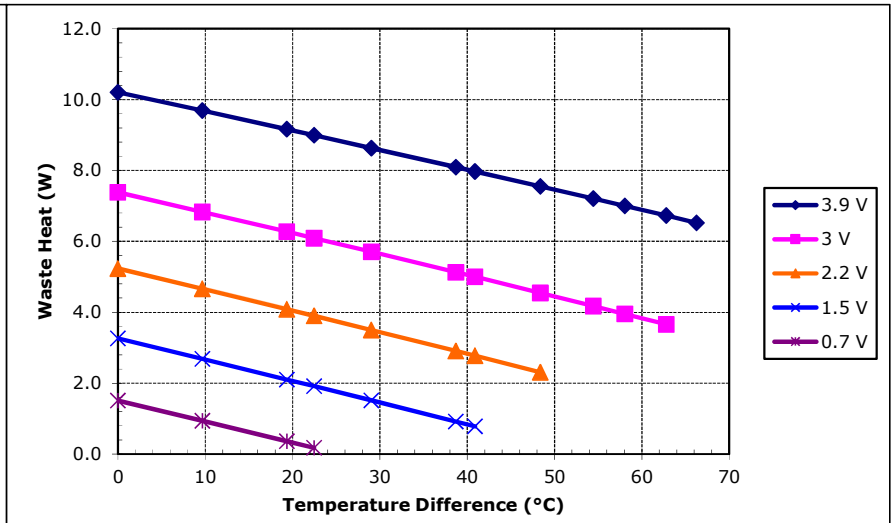

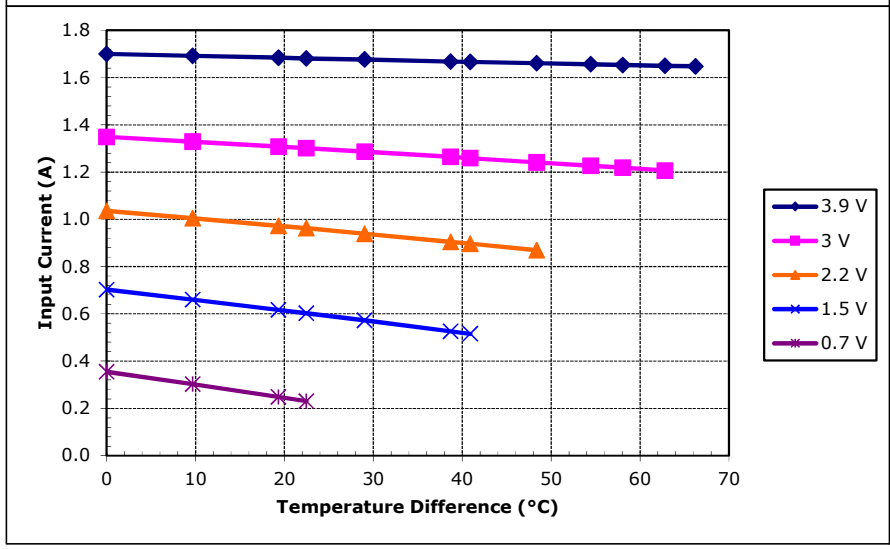

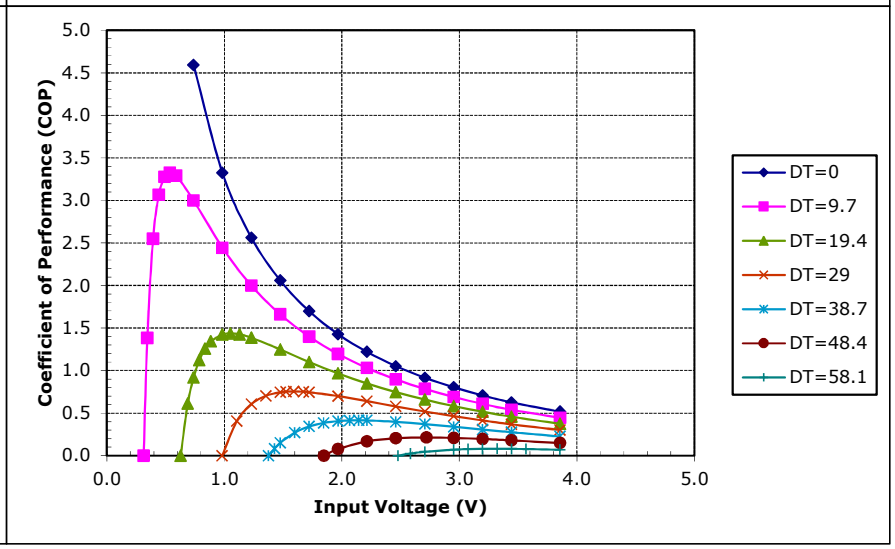

Potted TE-31-0.6-1.0 at a hot-side temperature of 30 °C

© 2018 TE Technology, Inc.

TE TECHNOLOGY, INC.®
1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

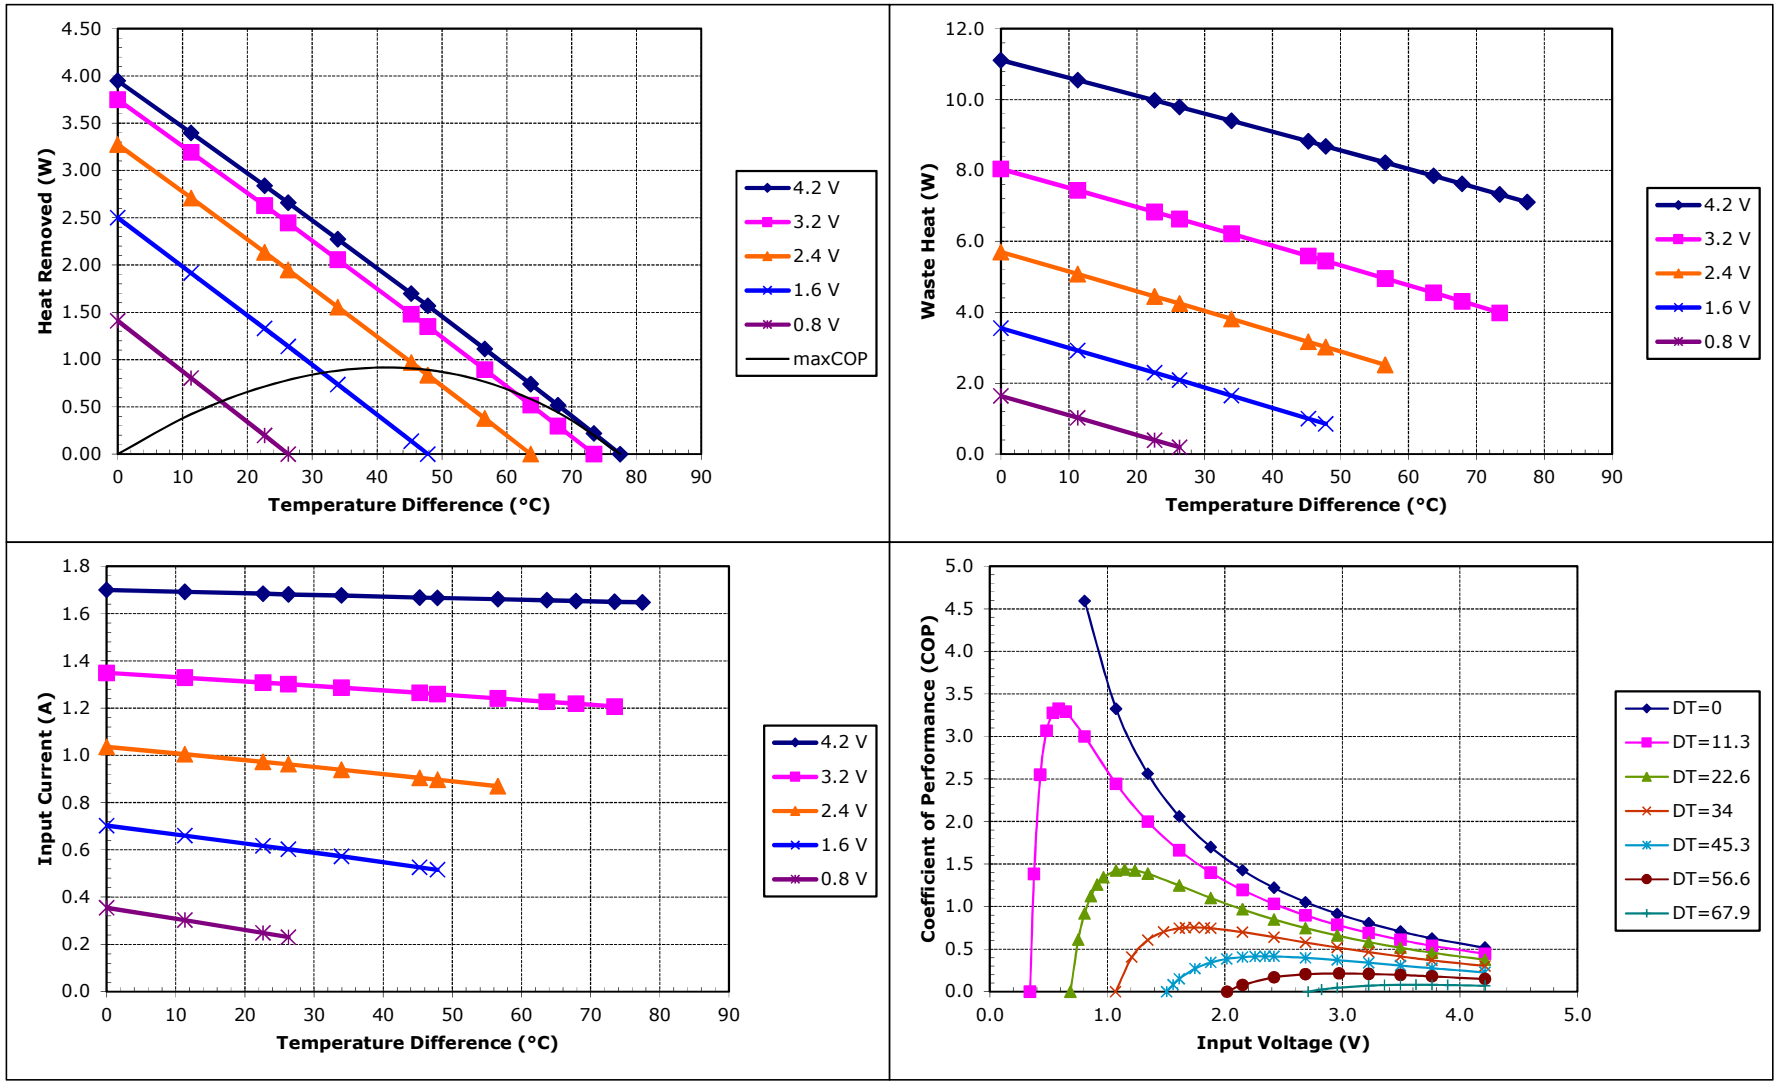

Unpotted TE-31-0.6-1.0 at a hot-side temperature of 50 °C

© 2018 TE Technology, Inc.

TE TECHNOLOGY, INC.®
1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

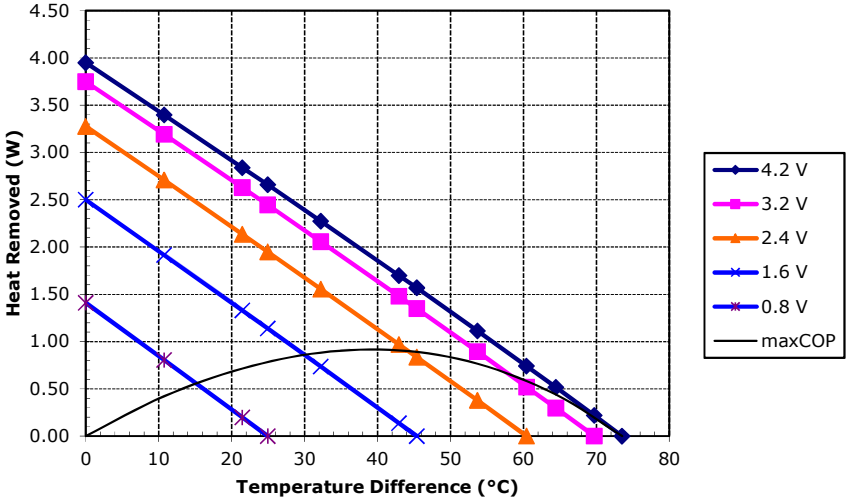

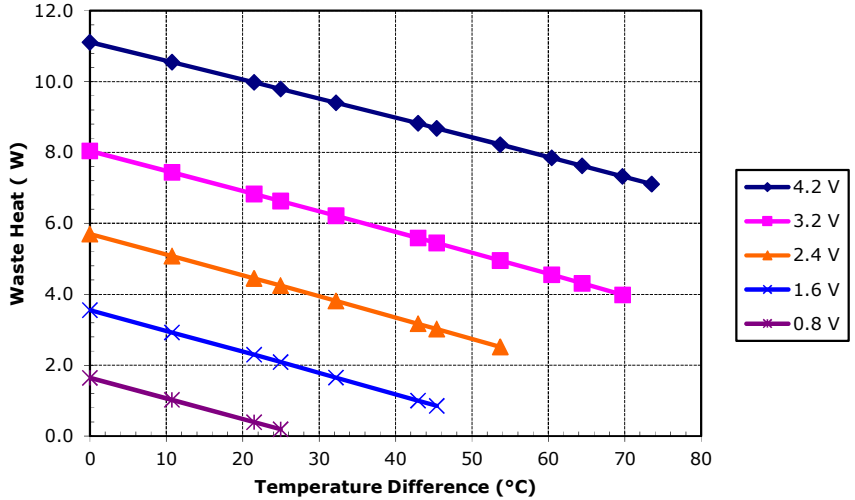

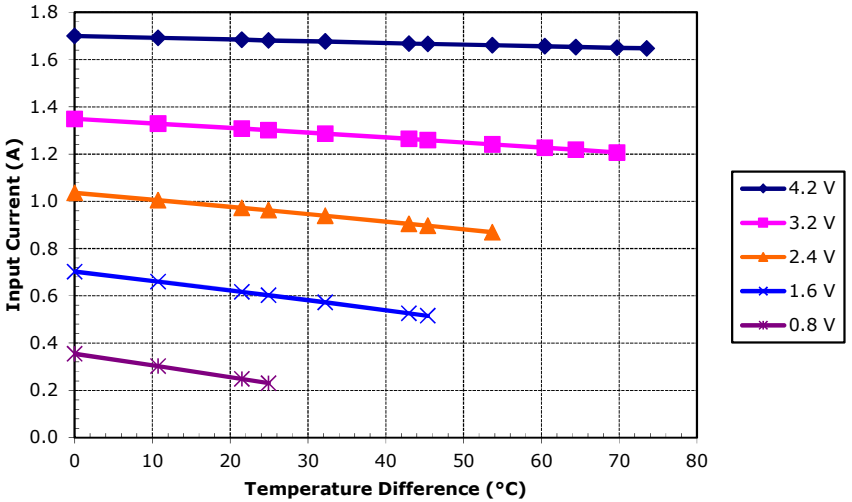

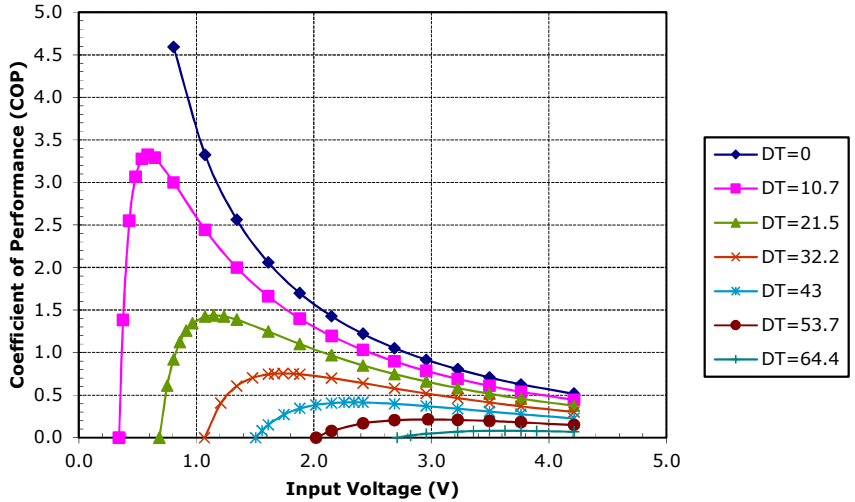

Potted TE-31-0.6-1.0 at a hot-side temperature of 50 °C

© 2018 TE Technology, Inc.

TE TECHNOLOGY, INC.®
1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

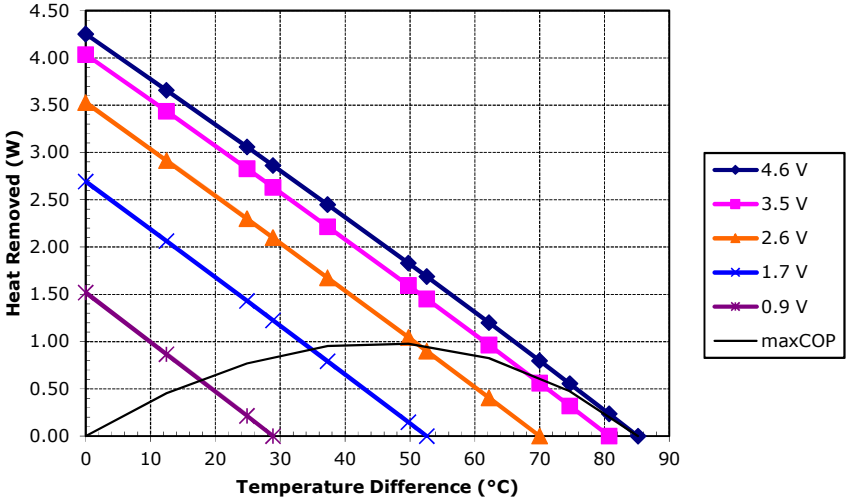

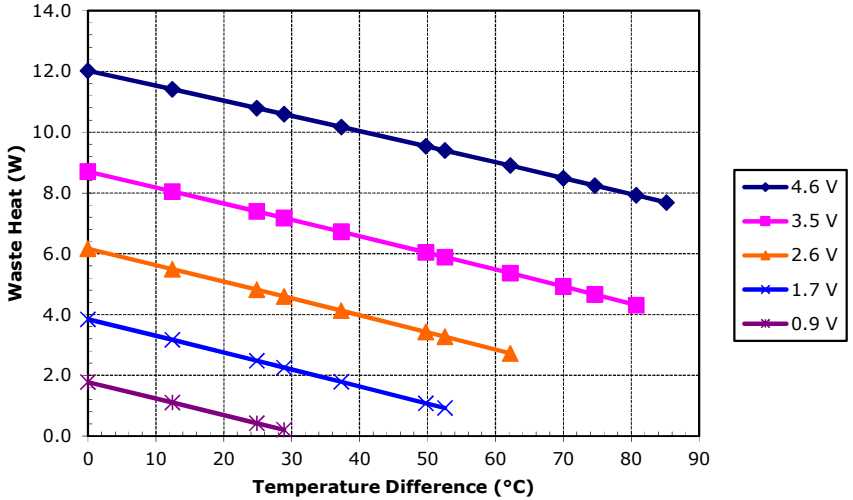

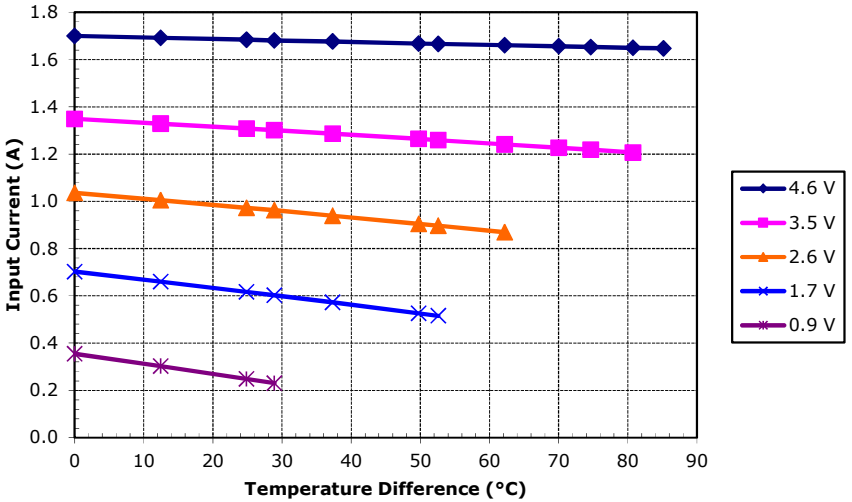

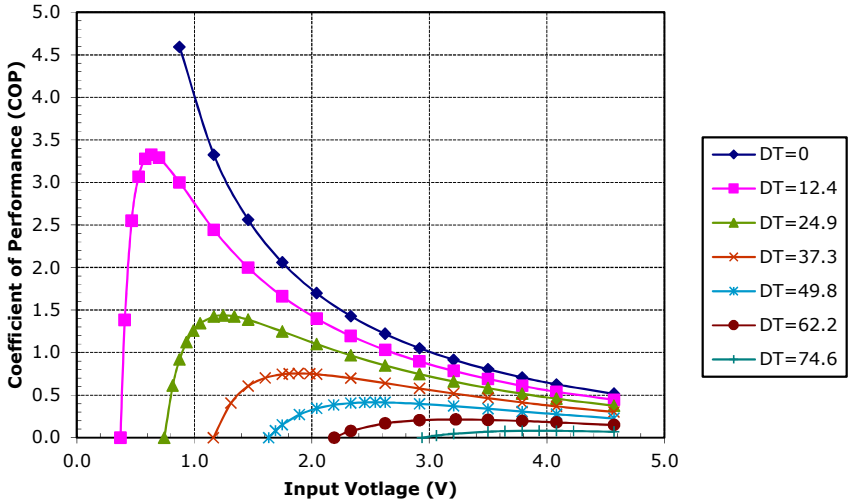

Unpotted TE-31-0.6-1.0 at a hot-side temperature of 70 °C

© 2018 TE Technology, Inc.

TE TECHNOLOGY, INC.®
1590 Keane Drive, Traverse City, MI, 49696-8257 USA
PH: 231-929-3966 FAX: 231-929-4163 email: cool@tetech.com
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

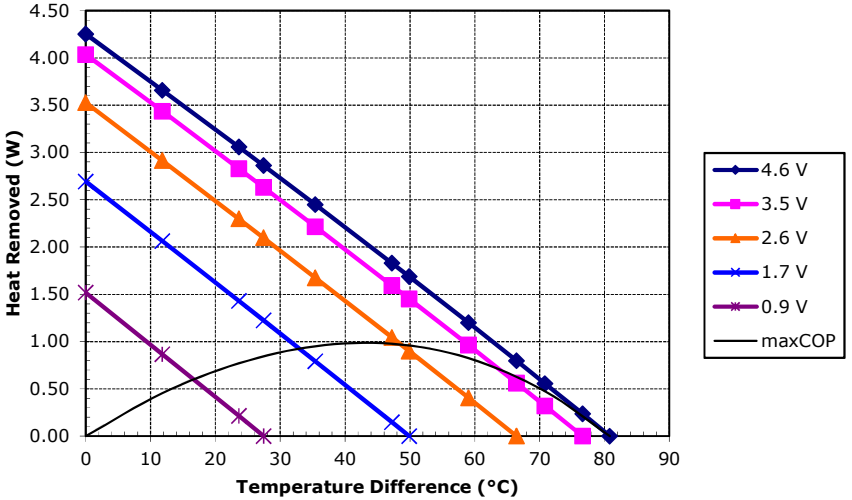

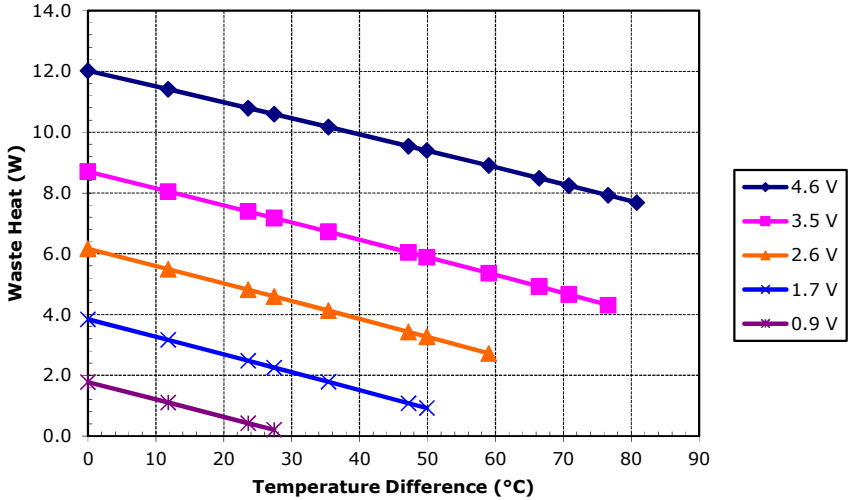

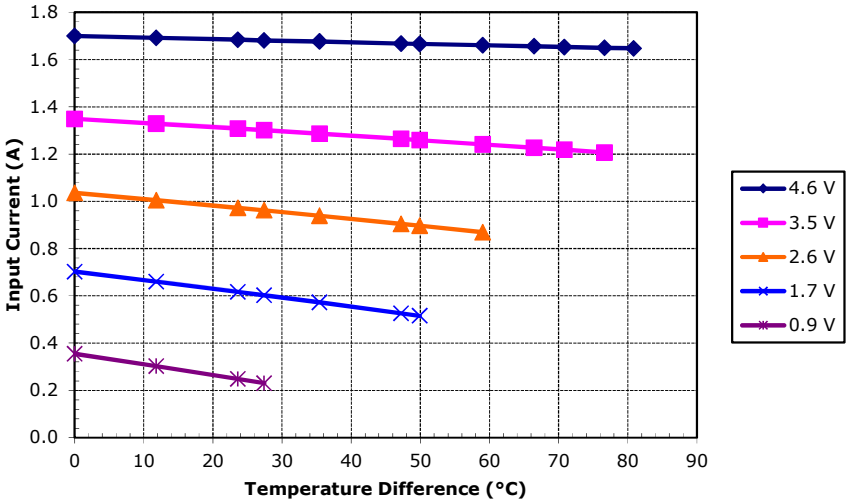

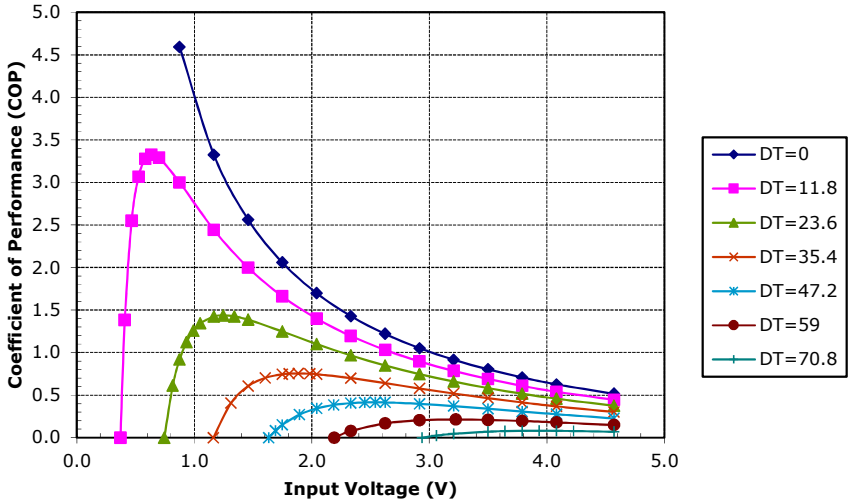

Potted TE-31-0.6-1.0 at a hot-side temperature of 70 °C

© 2018 TE Technology, Inc.